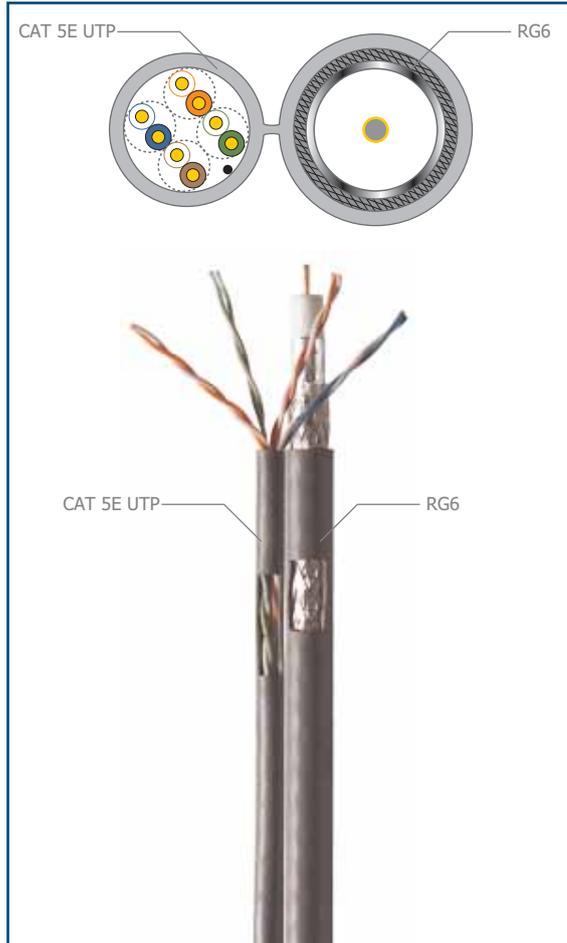


RG6 + CAT5E / Part No.: HY-1U5E1R60000
Description

- One or Two CAT5E LAN cables introduced for Gigabit Ethernet. One or Two coaxial cables used for CATV ,DBS, CCTV and video/audio applications.
- Packaging: Reel

Application

- Multimedia connections for Smart Home

Product Figure

Physical Characteristics

| | | |
|-----------------------------------|---|--|
| Structure | Construction | RG6 + CAT5E |
| | Conductor Dimension (mm) & AWG | LAN Cable: 0.505(24AWG) Coaxial: 1.02(18AWG) |
| | Conductor (LAN & Coaxial) | LAN Cable: Solid Bare Copper Coaxial: Copper Clad Steel / Solid Bare Copper |
| Insulation | Insulation material | LAN Cable: HDPE Coaxial: Foam PE |
| | Insulation Dimension (mm) | LAN Cable: 0.87 Coaxial: 4.57 |
| | Outer Shield & Material | PVC or LSZH |
| Outer Jacket | Outer Jacket Ripcord | Per customer request |
| | Operating Temp. Range | -20~75°C |
| Mechanical Characteristics | Max. Recommended Pulling Tension | LAN Cable: 110N Coaxial: 178N, |
| | Min. Bend Radius (Install) | LAN Cable: 4X O.D Coaxial: 10X O.D |
| | Flame Test | CMX, CM, CMG, CMR, IEC60332-1 |

* Custom configuration is available upon request.


Linkz International Limited

6/F, Photonics Centre, 2 Science Park East Avenue, Hong Kong Science Park, Shatin, Hong Kong.
 Tel: (852) 2425 4399 Fax: (852) 2418 1627 Email: sales@linkzindustries.com Website: http://www.linkzindustries.com

Part No.: 1U5E1R60000
Ver: D1/08