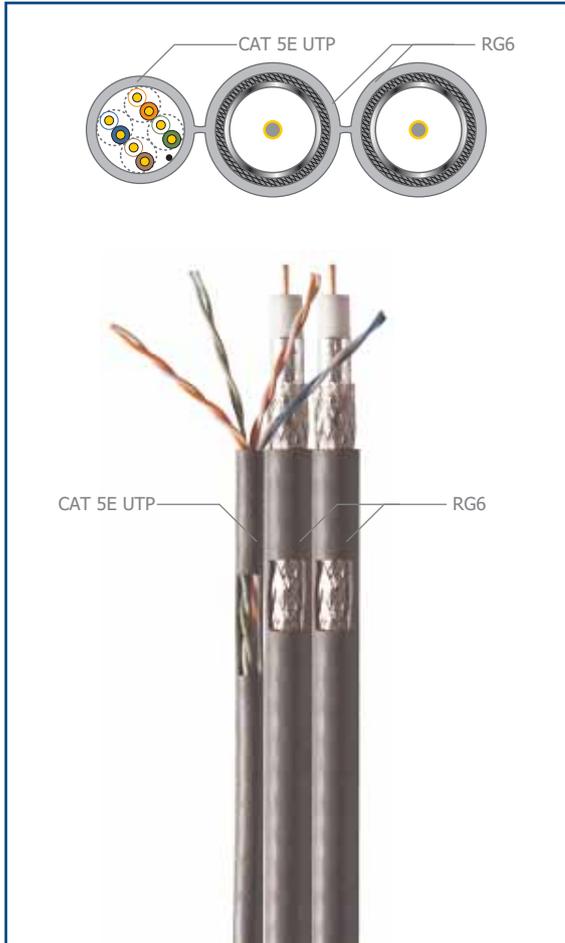


**2xRG6 + CAT5E / Part No.: HY-1U5E2R60000**
**Description**

- One or Two CAT5E LAN cables introduced for Gigabit Ethernet. One or Two coaxial cables used for CATV ,DBS, CCTV and video/audio applications.
- Packaging: Reel

**Application**

- Multimedia connections for Smart Home

**Product Figure**


\* Custom configuration is available upon request.

**Physical Characteristics**

<b>Structure</b>	<b>Construction</b>	2xRG6 + CAT5E
	<b>Conductor Dimension (mm) &amp; AWG</b>	<b>LAN Cable:</b> 0.505(24AWG) <b>Coaxial:</b> 1.02(18AWG)
	<b>Conductor (LAN &amp; Coaxial)</b>	<b>LAN Cable:</b> Solid Bare Copper <b>Coaxial:</b> Copper Clad Steel / Solid Bare Copper
<b>Insulation</b>	<b>Insulation material</b>	<b>LAN Cable:</b> HDPE <b>Coaxial:</b> Foam PE
	<b>Insulation Dimension (mm)</b>	<b>LAN Cable:</b> 0.87 <b>Coaxial:</b> 4.57
	<b>Outer Shield &amp; Material</b>	PVC or LSZH
<b>Outer Jacket</b>	<b>Outer Jacket Ripcord</b>	Per customer request
	<b>Operating Temp. Range</b>	-20~75°C
<b>Mechanical Characteristics</b>	<b>Max. Recommended Pulling Tension</b>	<b>LAN Cable:</b> 110N <b>Coaxial:</b> 178N,
	<b>Min. Bend Radius (Install)</b>	<b>LAN Cable:</b> 4X O.D <b>Coaxial:</b> 10X O.D
	<b>Flame Test</b>	CMX, CM, CMG, CMR, IEC60332-1

