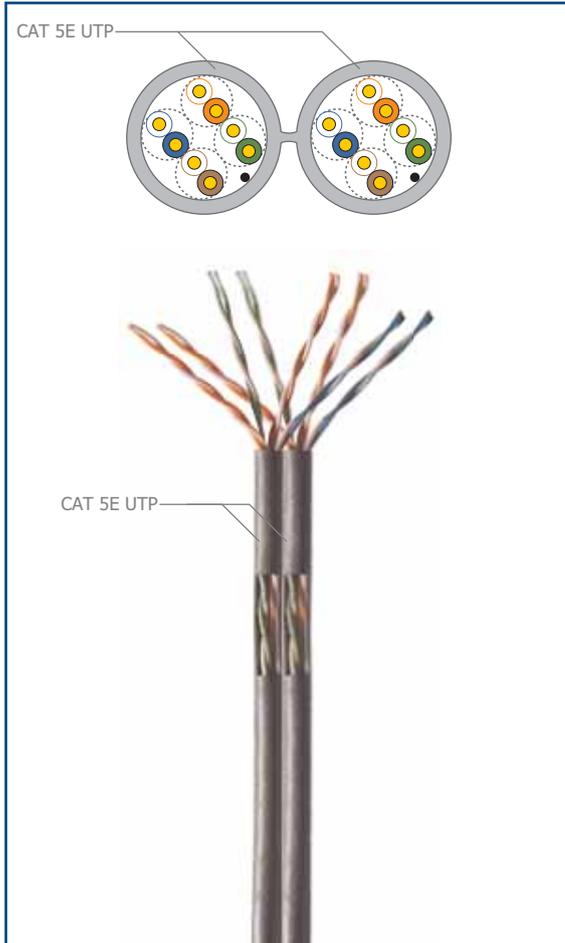


2xCAT5E / Part No.: HY-2U5E0000000
Description

- One or Two CAT5E LAN cables introduced for Gigabit Ethernet. One or Two coaxial cables used for CATV ,DBS, CCTV and video/audio applications.
- Packaging: Reel

Application

- Multimedia connections for Smart Home

Product Figure

Physical Characteristics

Structure	Construction	2xCAT5E
	Conductor Dimension (mm) & AWG	0.525(24AWG)
	Conductor	Solid Bare Copper
Insulation	Insulation material	HDPE
	Insulation Dimension (mm)	0.92
	Outer Shield & Material	PVC or LSZH
Outer Jacket	Outer Jacket Ripcord	Per customer request
	Operating Temp. Range	-20~75°C
Mechanical Characteristics	Max. Recommended Pulling Tension	110N
	Min. Bend Radius (Install)	4X O.D
	Flame Test	CMX, CM, CMG, CMR, IEC60332-1

* Custom configuration is available upon request.


Linkz International Limited

6/F, Photonics Centre, 2 Science Park East Avenue, Hong Kong Science Park, Shatin, Hong Kong.
 Tel: (852) 2425 4399 Fax: (852) 2418 1627 Email: sales@linkzindustries.com Website: http://www.linkzindustries.com

Part No.: 2U5E0000000
Ver: D1/08