

JIS (S-5C-FB) / Part No.: CX-15CXXXN-B2CP*


Description

- Rated temperature: 75°C
- Reference standard: JIS C 3502
- Solid Bare copper conductor
- Skin foam HDPE insulation
- Passes UL Riser flame test & CSA FT4 vertical flame test
- Packaging: Reel in Box, Reel

Application

- Drop cable for CATV and MATV distribution
- Master Antenna and community Antenna drops
- Direct broadcast satellite(DBS)
- Networking that integrates voice, video and data signal transmission

Product Figure

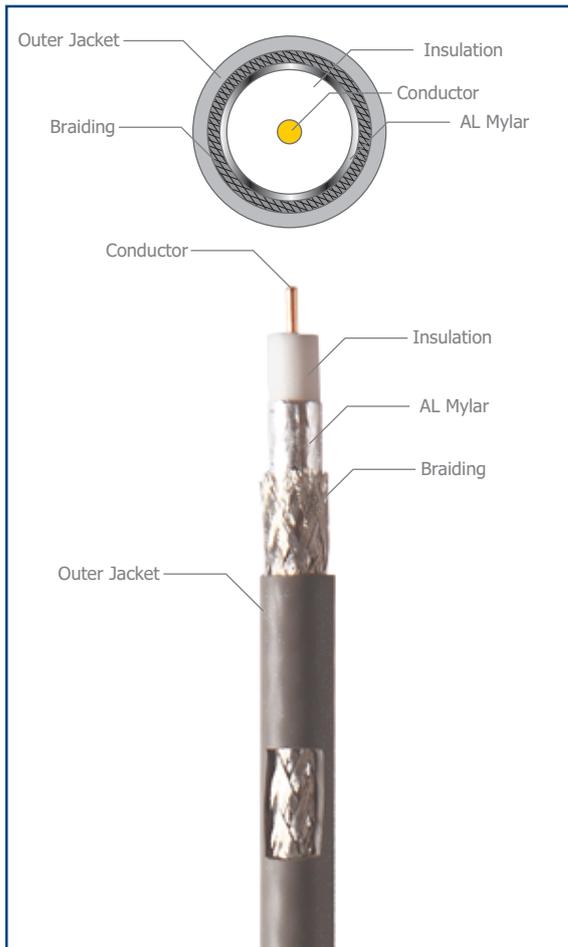

* Custom configuration is available upon request.

Physical Characteristics

Structure	Construction	18AWG BC
	Conductor Dimension (mm)	1.05
	Conductor Material	Solid Bare copper
Insulation	Insulation Material	Skin Foam HDPE
	Insulation Dimension (mm)	4.95
Shield	Outer Shield & Material	AL + 65% TIN Braiding
	Messenger	No
Outer Jacket	Outer Jacket Material	PVC
	Overall Nominal Diameter (mm)	7.7
Mechanical Characteristics	Operating Temp. Range	-20~75°C
	Bulk Cable Weight (KG)	63KG
	Nom. Mutual Capacitance @ 1kHz	≤ 56nF /100M
Electrical Characteristics	Flame Test	CMX, CM, CMG, CMR
	Nominal Velocity of Propagation	82%
	Max. Conductor DC Resistance @ 20 Deg. C	21.1Ω /100M

JIS High Frequency Electrical Characteristics

S-5C-FB			
Frequency(MHZ)	ATT(dB/100m)	Impedence	SWR
90	6.9	75± 3	≤ 1.7
220	11	75± 3	≤ 1.7
470	16.7	75± 3	≤ 1.7
770	21.9	75± 3	≤ 1.7
1300	31.1	75± 3	≤ 1.7
1551	34.7	75± 3	≤ 1.7
1770	37.7	75± 3	≤ 1.7

