


4PR 23AWG F/UTP CAT6A / Part No.: LN-A0423AF6A

Description	Application																																																																		
<ul style="list-style-type: none"> ■ Rated temperature: 75°C ■ Reference standard: UL Subject 444, EIA/TIA 568B.2-10 & ISO/IEC 11801, IEC 61156 ■ Solid bare copper conductor ■ Colour-coded PE insulation ■ Rip cord (optional) ■ PVC or LSZH jacket ■ Packaging: Reel, Reel in Box 	<ul style="list-style-type: none"> ■ 100 Base-T4 ■ 100Base-TX ■ 100VG-AnyLAN ■ 1000Base-T ■ 1000Base-TX ■ 155Mbps ATM ■ 622Mbps ATM 																																																																		
Product Figure 	Physical Characteristics <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Structure</th><th>Construction</th><th>F/UTP</th></tr> </thead> <tbody> <tr> <td></td><td>Number of Pairs</td><td>4 Pair</td></tr> <tr> <td></td><td>AWG</td><td>23AWG</td></tr> <tr> <td></td><td>Conductor Dimension (mm)</td><td>0.585</td></tr> <tr> <td></td><td>Solid or Stranded; Bare or Tinned</td><td>Solid Bare Copper</td></tr> <tr> <td rowspan="4">Insulation</td><td>Insulation Material</td><td>HDPE, FRPE</td></tr> <tr> <td>Insulation Dimension (mm)</td><td>1.15</td></tr> <tr> <td>Number Colour (Ring or Strip Marking)</td><td>1.White/Blue(Ring) & Blue 2.White/Orange(Ring) & Orange 3.White/Green(Ring) & Green 4.White/Brown(Ring) & Brown</td></tr> <tr> <td>Cross Filler</td><td>Yes</td></tr> <tr> <td rowspan="3">Shield</td><td>Individual Shield & Material</td><td>No</td></tr> <tr> <td>Outer Shield & Material</td><td>Yes (AL-Foil)</td></tr> <tr> <td>Drain Wire</td><td>Yes (Tinned Copper)</td></tr> <tr> <td rowspan="3">Outer Jacket</td><td>Outer Jacket Material</td><td>PVC or LSZH</td></tr> <tr> <td>Outer Jacket Ripcord</td><td>Per customer request</td></tr> <tr> <td>Overall Nominal Diameter (mm)</td><td>7.2 ± 0.3</td></tr> <tr> <td rowspan="6">Mechanical Characteristics</td><td>Operating Temp. Range</td><td>-20~75°C</td></tr> <tr> <td>Bulk Cable Weight (KG)</td><td>47KG</td></tr> <tr> <td>Max. Recommended PullingTension</td><td>110N</td></tr> <tr> <td>Min. Bend Radius (Install)</td><td>8 x O.D.</td></tr> <tr> <td>Flame Test</td><td>CMX, CM, CMG, CMR</td></tr> <tr> <td>Nom. Mutual Capacitance @ 1kHz</td><td>≤5.6nF /100M</td></tr> <tr> <td rowspan="7">Electrical Characteristics</td><td>Max. Capacitance Unbalance (pF/100m)</td><td>≤330pF /100M</td></tr> <tr> <td>Nominal Velocity of Propagation</td><td>65%</td></tr> <tr> <td>Max. Delay Skew (ns/100m)</td><td>≤45ns /100M</td></tr> <tr> <td>Max. Conductor DC Resistance @ 20 Deg. C</td><td>7.32Ω /100M (23AWG)</td></tr> <tr> <td>Max. DC Resistance Unbalance @ 20 Deg. C</td><td>≤5%</td></tr> <tr> <td>Max. Insulation Resistance (MΩ/km)</td><td>5000</td></tr> <tr> <td>Max. Operating Voltage-UL</td><td>300V</td></tr> </tbody> </table>	Structure	Construction	F/UTP		Number of Pairs	4 Pair		AWG	23AWG		Conductor Dimension (mm)	0.585		Solid or Stranded; Bare or Tinned	Solid Bare Copper	Insulation	Insulation Material	HDPE, FRPE	Insulation Dimension (mm)	1.15	Number Colour (Ring or Strip Marking)	1.White/Blue(Ring) & Blue 2.White/Orange(Ring) & Orange 3.White/Green(Ring) & Green 4.White/Brown(Ring) & Brown	Cross Filler	Yes	Shield	Individual Shield & Material	No	Outer Shield & Material	Yes (AL-Foil)	Drain Wire	Yes (Tinned Copper)	Outer Jacket	Outer Jacket Material	PVC or LSZH	Outer Jacket Ripcord	Per customer request	Overall Nominal Diameter (mm)	7.2 ± 0.3	Mechanical Characteristics	Operating Temp. Range	-20~75°C	Bulk Cable Weight (KG)	47KG	Max. Recommended PullingTension	110N	Min. Bend Radius (Install)	8 x O.D.	Flame Test	CMX, CM, CMG, CMR	Nom. Mutual Capacitance @ 1kHz	≤5.6nF /100M	Electrical Characteristics	Max. Capacitance Unbalance (pF/100m)	≤330pF /100M	Nominal Velocity of Propagation	65%	Max. Delay Skew (ns/100m)	≤45ns /100M	Max. Conductor DC Resistance @ 20 Deg. C	7.32Ω /100M (23AWG)	Max. DC Resistance Unbalance @ 20 Deg. C	≤5%	Max. Insulation Resistance (MΩ/km)	5000	Max. Operating Voltage-UL	300V
Structure	Construction	F/UTP																																																																	
	Number of Pairs	4 Pair																																																																	
	AWG	23AWG																																																																	
	Conductor Dimension (mm)	0.585																																																																	
	Solid or Stranded; Bare or Tinned	Solid Bare Copper																																																																	
Insulation	Insulation Material	HDPE, FRPE																																																																	
	Insulation Dimension (mm)	1.15																																																																	
	Number Colour (Ring or Strip Marking)	1.White/Blue(Ring) & Blue 2.White/Orange(Ring) & Orange 3.White/Green(Ring) & Green 4.White/Brown(Ring) & Brown																																																																	
	Cross Filler	Yes																																																																	
Shield	Individual Shield & Material	No																																																																	
	Outer Shield & Material	Yes (AL-Foil)																																																																	
	Drain Wire	Yes (Tinned Copper)																																																																	
Outer Jacket	Outer Jacket Material	PVC or LSZH																																																																	
	Outer Jacket Ripcord	Per customer request																																																																	
	Overall Nominal Diameter (mm)	7.2 ± 0.3																																																																	
Mechanical Characteristics	Operating Temp. Range	-20~75°C																																																																	
	Bulk Cable Weight (KG)	47KG																																																																	
	Max. Recommended PullingTension	110N																																																																	
	Min. Bend Radius (Install)	8 x O.D.																																																																	
	Flame Test	CMX, CM, CMG, CMR																																																																	
	Nom. Mutual Capacitance @ 1kHz	≤5.6nF /100M																																																																	
Electrical Characteristics	Max. Capacitance Unbalance (pF/100m)	≤330pF /100M																																																																	
	Nominal Velocity of Propagation	65%																																																																	
	Max. Delay Skew (ns/100m)	≤45ns /100M																																																																	
	Max. Conductor DC Resistance @ 20 Deg. C	7.32Ω /100M (23AWG)																																																																	
	Max. DC Resistance Unbalance @ 20 Deg. C	≤5%																																																																	
	Max. Insulation Resistance (MΩ/km)	5000																																																																	
	Max. Operating Voltage-UL	300V																																																																	

* Custom configuration is available upon request.

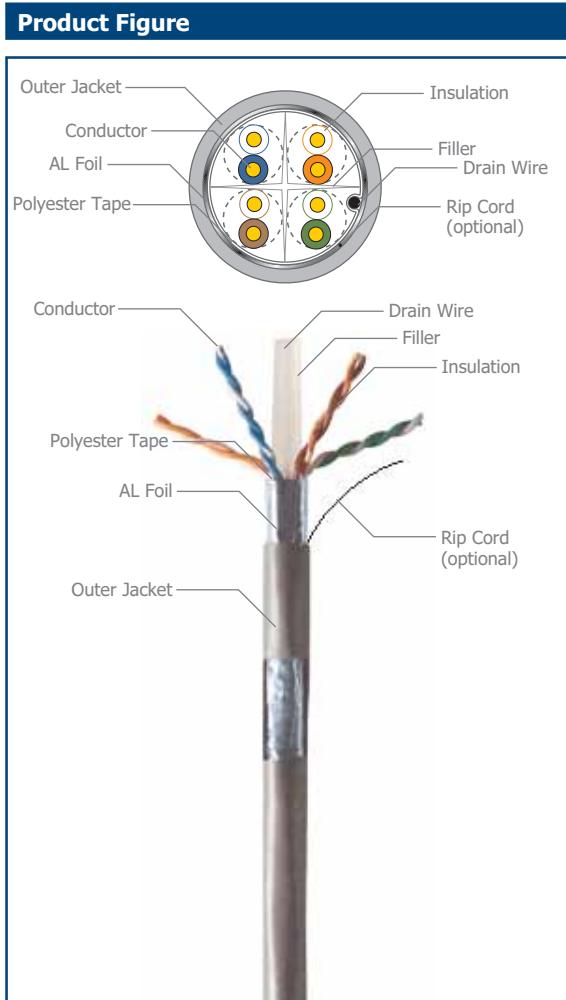

4PR 23AWG F/UTP CAT6A / Part No.: LN-A0423AF6A
TIA/EIA 568-B.2 Electrical Characteristics

Frequency (MHz)	Input Impedance (Ohms)	ATT (dB/100m)	RL (dB)	NEXT (dB)	PSNEXT (dB)	ELFEXT (dB/100m)	PSELFEXT (dB/100m)	TCL (dB)	Delay (ns/100m)	PSANEXT (dB)	PSACCRF (dB)
4	100 ± 15	3.7	23.0	65.3	63.3	55.8	52.8	40.0	552.0	67.0	66.2
8	100 ± 15	5.2	24.5	60.8	58.8	49.7	46.7	40.0	546.7	67.0	60.1
10	100 ± 15	5.9	25.0	59.3	57.3	47.8	44.8	40.0	545.4	67.0	58.2
16	100 ± 15	7.4	25.0	56.2	54.2	43.7	40.7	38.0	543.0	67.0	54.1
20	100 ± 15	8.3	25.0	54.8	52.8	41.8	38.8	37.0	542.0	67.0	52.2
25	100 ± 15	9.3	24.3	53.3	51.3	39.8	36.8	36.0	541.2	67.0	50.2
31.25	100 ± 15	10.4	23.6	51.9	49.9	37.9	34.9	35.1	540.4	67.0	48.3
62.5	100 ± 15	14.9	21.5	47.4	45.4	31.9	28.9	32.0	538.6	65.6	42.3
100	100 ± 15	19.0	20.1	44.3	42.3	27.8	24.8	30.0	537.6	62.5	38.2
125	100 ± 25	21.4	19.4	42.8	40.8	25.9	22.9	29.0	537.2	61.0	36.3
200	100 ± 25	27.5	18.0	39.8	37.8	21.8	18.8	27.0	536.5	58.0	32.2
250	100 ± 25	31.0	17.3	38.3	36.3	19.8	16.8	26.0	536.3	56.5	30.2
300	100 ± 25	34.2	16.8	37.1	35.1	18.3	15.3	25.2	536.1	55.3	28.7
400	100 ± 25	40.0	15.9	35.3	33.3	15.8	12.8	24.0	535.8	53.5	26.2
500	100 ± 25	45.3	15.2	33.8	31.8	13.8	10.8	23.0	535.6	52.0	24.2

LAN Cable Series

Specifications may change without notice.


Linkz International Limited

 6/F, Photonics Centre, 2 Science Park East Avenue, Hong Kong Science Park, Shatin, Hong Kong.
 Tel: (852) 2425 4399 Fax: (852) 2418 1627 Email: sales@linkzindustries.com Website: http://www.linkzindustries.com