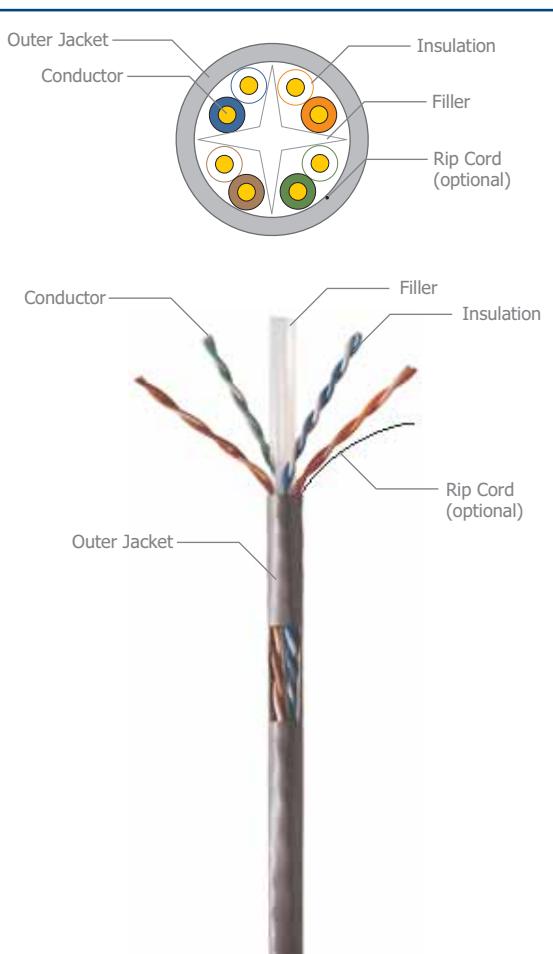


4PR 23AWG U/UTP SOLID CAT6 / Part No.: LN-A0423AUC6
Description

- Rated temperature: 75°C
- Reference standard: UL Subject 444, EIA/TIA 568B.2-1 & ISO/IEC 11801, IEC 61156
- Solid bare copper conductor
- Colour-coded PE insulation
- Rip cord (optional)
- PVC or LSZH jacket
- Packaging: Reel, Reel in Box or Reellex II

Application

- 100 Base-T4
- 100Base-TX
- 100VG-AnyLAN
- 1000Base-T
- 1000Base-TX
- 155Mbps ATM
- 622Mbps ATM

Product Figure

Physical Characteristics

Structure	Construction	U/UTP
	Number of Pairs	4 Pair
	AWG	23 AWG
	Conductor Dimension (mm)	0.572
Insulation	Solid or Stranded; Bare or Tinned	Solid Bare Copper
	Insulation Material	HDPE, FRPE
	Insulation Dimension (mm)	1.02
	Number Colour (Ring or Strip Marking)	1.White/Blue(Ring) & Blue 2.White/Orange(Ring) & Orange 3.White/Green(Ring) & Green 4.White/Brown(Ring) & Brown
Shield	Cross Filler	Yes
	Individual Shield & Material	No
	Outer Shield & Material	No
Outer Jacket	Drain Wire	No
	Outer Jacket Material	PVC or LSZH
	Outer Jacket Ripcord	Per customer request
Mechanical Characteristics	Overall Nominal Diameter (mm)	23AWG UTP nom:6.2mm
	Operating Temp. Range	-20~75°C
	Bulk Cable Weight (KG)	43KG
	Max. Recommended PullingTension	110N
	Min. Bend Radius (Install)	25.4mm
Electrical Characteristics	Flame Test	CMX, CM, CMG, CMR, IEC60332-1
	Nom. Mutual Capacitance @ 1kHz	≤5.6nF /100M
	Max. Capacitance Unbalance (pF/100m)	≤330pF/100M(Per TIA/EIA-568B.2) ≤160pF/100M(Per IEC 61156)
	Nominal Velocity of Propagation	65%
	Max. Delay Skew (ns/100m)	≤45ns /100M
Electrical Characteristics	Max. Conductor DC Resistance @ 20 Deg. C	7.32Ω /100M
	Max. DC Resistance Unbalance @ 20 Deg. C	≤5%(Per TIA/EIA-568B.2) ≤2%(Per IEC 61156-5)
	Max. Insulation Resistance (MΩ/km)	5000
	Max. Operating Voltage-UL	300V

* Custom configuration is available upon request.



4PR 23AWG U/UTP SOLID CAT6 / Part No.: LN-A0423AUC6
TIA/EIA-568B.2 Electrical Characteristics

Frequency (MHz)	Input Impedance (Ohms)	ATT (dB/100m)	RL (dB)	NEXT (dB)	PSNEXT (dB)	ELEFEXT (dB)	PSELFEXT (dB)	PD (ns/100m)
1	100 ± 15	2.0	20.0	77.3	75.3	70.8	68.8	570.0
4	100 ± 15	3.8	23.0	68.3	66.3	58.8	56.8	552.0
8	100 ± 15	5.3	24.5	63.8	61.8	52.7	50.7	546.7
10	100 ± 15	6.0	25.0	62.3	60.3	50.8	48.8	545.4
16	100 ± 15	7.6	25.0	59.2	57.2	46.7	44.7	543.0
20	100 ± 15	8.5	25.0	57.8	55.8	44.8	42.8	542.0
25	100 ± 15	9.5	24.3	56.3	54.3	42.8	40.8	541.2
31.25	100 ± 15	10.7	23.6	54.9	52.9	40.9	38.9	540.4
62.5	100 ± 15	15.4	21.5	50.4	48.4	34.9	32.9	538.6
100	100 ± 15	19.8	20.1	47.3	45.3	30.8	28.8	537.6
200	100 ± 22	29.0	18.0	42.8	40.8	24.8	22.8	536.5
250	100 ± 22	32.8	17.3	41.3	39.3	22.8	20.8	536.3
300	100 ± 25	36.4	16.8	40.1	38.1	21.3	19.3	536.1

IEC-61156-5 Electrical Characteristics

Frequency (MHz)	Input Impedance (Ohms)	ATT (dB/100m)	RL (dB)	NEXT (dB)	PSNEXT (dB)	ELEFEXT (dB)	PSELFEXT (dB)
4	100 ± 15	3.8	23.0	66.3	63.3	56.0	53.0
8	100 ± 15	5.4	24.5	61.8	58.8	49.9	46.9
10	100 ± 15	6.0	25.0	60.3	57.3	48.0	45.0
16	100 ± 15	7.6	25.0	57.2	54.2	43.9	40.9
20	100 ± 15	8.5	25.0	55.8	52.8	42.0	39.0
25	100 ± 15	9.6	24.3	54.3	51.3	40.0	37.0
31.25	100 ± 15	10.7	23.6	52.9	49.9	38.1	35.1
62.5	100 ± 15	15.5	21.5	48.4	45.4	32.1	29.1
100	100 ± 15	19.9	20.1	45.3	42.3	28.0	25.0
200	100 ± 22	29.1	18.0	40.8	37.8	22.0	19.0
250	100 ± 22	33.0	17.3	39.3	36.3	20.0	17.0

